



Transmission in action



TotalEnergies



Table of content

TotalEnergies, Committed to Better Energy	4
Transmission Oil, the secret of your tranquility	5
Confidence inside gives the best performance outside	6
Put the transmission in action and let the rest happen	8
Traxium, advanced range for manual gearboxes and axles	10
Transtec, middle range for manual gearboxes and axles	12
Fluidmatic, advanced range for automatic gearboxes	14



TotalEnergies

CUTTING EDGE R&D IN LUBRICANT INNOVATION FOR OVER 60 YEARS

TotalEnergies Lubrifiants is a leading global manufacturer and marketer of lubricants. We have 42 production plants worldwide and more than 5,800 employees in 160 countries. TotalEnergies Lubrifiants offers innovative, efficient and environmentally responsible products and services developed by more than 300 researchers at its R&D center. TotalEnergies Lubrifiants is a partner of choice for the automotive, industrial and marine markets.

A LEADING GLOBAL ENERGY COMPANY

TotalEnergies Marketing & Services develops and markets products primarily derived from crude oil, along with all the associated services. Our 31,000 employees are present in 109 countries and our product and service offerings are sold in 160 countries.

Every day, TotalEnergies Marketing & Services serves more than 8 million customers in our network of over 14,000 service stations in 62 countries. As the world's fourth-largest distributor of lubricants and the leading distributor of petroleum products in Africa, TotalEnergies Marketing & Services operates 50 production sites worldwide where we manufacture the lubricants, bitumen, additives, special fuels and fluids that sustain our growth.

TotalEnergies, COMMITTED TO BETTER ENERGY

TotalEnergies is a major energy player, that produces and markets fuels, natural gas and low-carbon electricity. Our 98,000 employees are committed to better energy that is safer, more affordable, cleaner and accessible to as many people as possible. Active in more than 130 countries, our ambition is to become the responsible energy major.



Transmission Oil, the secret of your tranquility



GET INSIDE A COMPLETE RANGE OF HIGH-TECH LUBRICANTS

The driveline is an essential element of your vehicle that requires optimal lubrication to exploit its full potential. This is why our lubricants are continuously evolving over time to accompany the evolution of gearboxes and axles technologies. As a result, we offer a full range of high-tech lubricants dedicated to axles, manual and automatic transmissions.

Traxium
Fluidmatic
Transtec



Confidence inside give the best performance outside

THE TRACK IS OUR LAB

TotalEnergies Lubrifiants is a significant player in the field of motor sports (World Rally Championship, MotoGP, Endurance and Rally Raid), supplying race teams and organizers with products and services of exceptional quality.

The expertise developed for motor racing guarantees to the drivers an optimized "protection, reliability and performance" for their engines and transmissions.

This is because racing is an unrivalled experimental laboratory for the development of tomorrow's consumer products.




PERFORMANCE & INNOVATION



R&D AT ITS BEST

Transmission is an unknown and complex component of heavy duty vehicles and passenger cars, often underrated but it is an essential equipment for the availability rate and performance of the vehicles.

TotalEnergies invests a huge time and resources in the R&D that allows to improve considerably the performance of our range of transmission fluids to accompany vehicle and equipment manufacturers.

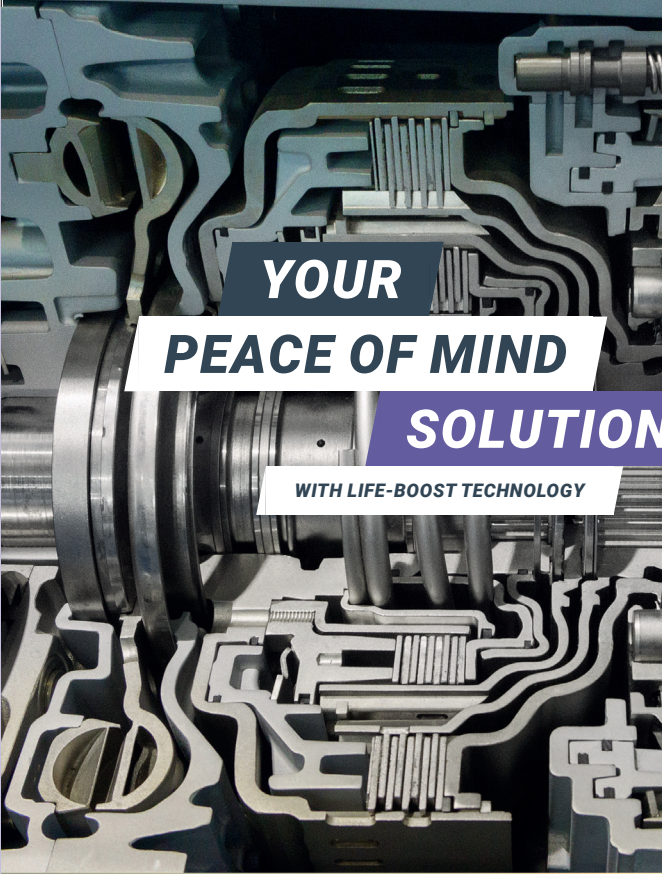

**YOUR
PEACE OF MIND
SOLUTION**

WITH LIFE-BOOST TECHNOLOGY



- ★ EXTENDED DRAIN INTERVALS ✓ REDUCED TCO
- ✓ OEMS APPROVALS ✓ DURABILITY

Our products with Life-boost technology will maximise the durability of the components and parts of the driveline equipments of your vehicle. We guarantee the Durability of your driveline equipments because our products are approved by the Manufacturers. Our products will offer the best services as your vehicle will require drastically less maintenance by providing reduced Total Cost Ownership (TCO) with on top significant extended drain intervals. A solution which offer a peace of mind throughout the normal life time of your vehicle.



**REDUCE
YOUR MAINTENANCE
COST**

WITH SAVINGS TECHNOLOGY



- ★ REDUCED TCO ✓ OEMS APPROVALS ✓ DURABILITY

Our range of products with savings technology are formulated to guarantee long life performances. They will contribute over time to reduce your maintenance costs as your vehicle will run with fewer interruptions. This will guarantee a reduced Total Cost Ownership (TCO) that will make the difference.



**LUBRICANTS
YOU CAN TRUST**

WITH APPROVED TECHNOLOGY



- ★ OEMS APPROVALS ✓ DURABILITY

We develop tailor-made lubricants in our advanced R&D center in France in close collaboration with vehicle and equipment manufacturers. By working this way we fulfill their most specific technical requirements allowing our products to be approved by those manufacturers.

Transmission in action

Put the transmission in action and let the rest happen



EXCELLENT VISCOSITY STABILITY

Our products are formulated to remain shear stable over time providing extended life time of the fluid.

Even under very severe constraints of shear, to ensure adequate lubrication all over time.

Moreover, it provides fast and reliable lubrication at extreme cold temperatures.




EXCEPTIONAL FRICTION AND ANTI-SHUDDER PERFORMANCES

Our transmission oil technology provides consistent shift performance for the life of the transmission.


It helps to maintain an excellent shifting quality over a very long time, improves overall transmission and contributes to fuel economy.

Each product has been formulated with selected friction modifiers which provide excellent friction characteristics. These improve driver's comfort with smooth and efficient shifting without shudder.



FUEL ECONOMY PROPERTIES


Because of their formulation and excellent low temperature performance, our fluids provide extended fuel economy benefits.



FILM-STRENGTH AND ANTI-WEAR PROPERTIES


Outstanding film-strength and anti-wear properties which provide a perfect lubrication all over time and protection of the transmission.

These properties give you a very good protection against wear and long transmission life.



EXCELLENT PARTS MATERIAL COMPATIBILITY

A wide range of lubricants which are adapted to the specific needs of each of our customers, and manufacturers technical requirements.



ENHANCED THERMAL STABILITY AND OXIDATION RESISTANCE

Our high quality synthetic base oils and superior anti-oxidant and detergent additives provide a very good oxidation control of the fluid over time even in very severe conditions.

Outstanding oxidation and thermal stability resulting in lower deposit, for a maximal drain interval capability and better protection to extend life and performance of your product.

Traxium

advanced range for manual transmissions and axles




The driveline is just as important as the engine to maximize your overall vehicle performance.

Developed in state-of-art research facilities, TotalEnergies' range of innovative oils is just what you need for longer protection, higher efficiency and industry-approved performance.

Oxidation Performance test
CEC L-48-A-00

163°C
during
384 H

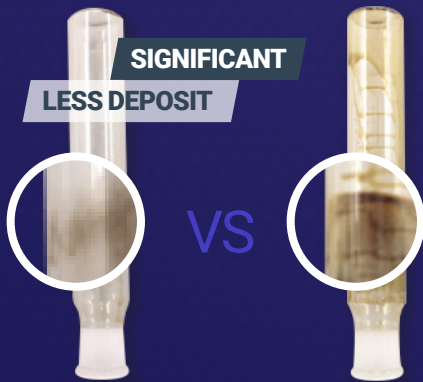

Traxium
Gear 9 FE 75W-80

STANDARD
LUBRICANT

9

Traxium



8

Traxium



7


Traxium



6

Traxium



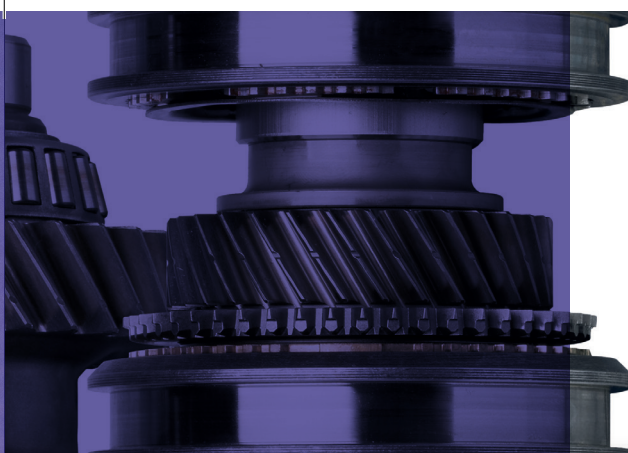

STANDARD LEVEL



ADVANCED LEVEL

PRODUCT BENEFITS

Fuel economy
Durability
Gear shifting
Extended drain intervals
OEM approved

Product name			International specifications	OEM specifications	Fuel economy	Durability	Gear shifting	Extended drain intervals	OEM approved
Traxium Dual 9 FE 75W-90	✓	✓	API GL-4 / API GL-5 / API MT-1 / SAE J2360 / MIL-PRF 2105 E / MIL-L 2105 D	MB-APPROVAL 235.8, MAN 341 TYPE Z-2, MAN 342 TYPE S-1, SCANIA STO 1:1 G / SCANIA STO 2:0 A FS / VOLVO 97312 / MACK GO-J PLUS, ZF TE-ML 02B / 05A / 12L / 12N / 16F / 17B / 19C / 21A, MERITOR 076-N, DAF, IVECO RAST, MEET THE REQUIREMENTS OF: SCANIA STO 1:0	✓	✓	✓	★	★
Traxium Gear 9 FE 75W-90		✓	API GL-4	MB-APPROVAL 235.11	✓	✓	✓	★	✓
Traxium Gear 9V FE 75W-90		✓	API GL-4	VOLVO 97315	✓	★	✓	★	✓
Traxium Gear 9 FE 75W-80		✓	API GL-4	ZF TE-ML 01E / 02E / 16P, VOITH CLASS C, VOLVO 97307, MAN 341 TYPE Z5, MAN 341 TYPE VR, MB-APPROVAL 235.29, IVECO MGS2	✓	✓	✓	★	★
Traxium Gear 9 FE SAE 75W	✓		API GL-4	PSA B71 2316 / PSA B71 2317	★	✓	✓		✓
Traxium Gear 9 SG 75W-90		✓	API GL-4	SCANIA STO 2:0 G	✓	★	✓	★	★
Traxium Axle 9 FE 75W-140		✓	API GL-5 / SAE J2360 (LEVEL) / MIL-L 2105 D / MIL-PRF-2105 E	SCANIA STO 2:0A	✓	✓		★	✓
Traxium Axle 9 80W-90		✓	API GL-5, MT-1 / SAE J2360 (N°PRI GL 0660 AND 0662) / MIL-L 2105 D AND MIL-PRF 2105 E	MB-APPROVAL 235.20 / MAN 342 TYPE M3 / MAN 341 TYPE GA1 / SCANIA STO 1:0 / ZF TE-ML 05A, 12L, 12M, 16B, 17B, 19B, 21A / IVECO RAM1 / MACK GO-J		✓		★	★
Traxium Dual 8 FE 80W-90		✓	API GL-4 / API GL-5 / API MT-1 / MIL-L 2105 D	MAN 341 TYPE Z2 / MAN 342 TYPE M2 / SCANIA STO 1:0 / SCANIA STO 1:1 G / VOLVO 97321 / MACK GO-J / ZF TE-ML 05A/12L/12M/16B/17H/19B/21A / IVECO RAM1 • MEETS THE REQUIREMENTS OF: MAN 341 TYPE E2	✓	✓	✓	✓	★
Traxium Gear 8 FE 75W-80		✓	API GL-4	MAN 341 TYPE E-3 / MAN 341 TYPE Z-4 / ZF TE-ML 01L, 02L, 16K / VOLVO 97307 / DAF / IVECO MGST	✓	✓	✓	★	✓
Traxium Gear 8 75W-80	✓		API GL-4	PSA PEUGEOT CITROEN B71 2330		✓	✓		✓
Traxium Axle 8 FE 75W-140		✓	API GL-5 / MIL-L-2105 D	SCANIA STO 1:0	✓	✓			✓
Traxium Axle 8 80W-90	✓		API GL-5 (LS) / MIL-L-2105 D	PSA PEUGEOT CITROEN B71 2375		✓			✓
Traxium Axle 8 FE 80W-140		✓	API GL-5 / API MT-1 / MIL-PRF-2105E / MIL-L-2105 D	SCANIA STO 1:0 / ZF TE-ML 05A, 12M, 16D, 21A	✓	✓			✓
Traxium Axle 8 85W-140		✓	API GL-5 / SAE J2360 / MIL-PRF-2105E AND MIL-L-2105 D	SCANIA STO 1:0 / IVECO RAM2 / MEETS THE REQUIREMENTS OF: VOLVO 97321 / MACK GO-J	✓	✓			✓
Traxium Gear 7 80W-90		✓	API GL-4	MB-APPROVAL 235.1 / ZF TE-ML 16A,17A,19A / MEETS THE REQUIREMENTS OF: MAN 341 TYPE E-1		✓			✓
Traxium Gear 7 80W-85		✓	API GL-4	MB-APPROVAL 235.1 / ZF TE-ML 17A		✓			✓
Traxium Gear 7 85W-90		✓	API GL-4	ZF TE-ML 16A/17A/19A		✓			✓
Traxium Axle 7 80W-90		✓	API GL-5	ZF TE-ML 12E, 17B, 19B, 21A / MAN 342 TYPE M-2 / VOLVO 97305 / IVECO RAM1 SUITABLE FOR USE: MAN 341 TYPE M-1		✓			✓
Traxium Axle 7 85W-90		✓	API GL-5	MAN 342 TYPE M-1 / ZF TE-ML 16C, 17B, 19B, 21A / MB-APPROVAL 235.0		✓			✓
Traxium Axle 7 85W-140		✓	API GL-5	ZF TE-ML 05A, 12E, 16D, 21A / IVECO RAM2		✓			✓
Traxium Gear 6 75W-80	✓		API GL-4	SUITABLE FOR: BMW MTF LT-1 / LT-2 / LT-3 / LT-4/VW / FORD WSD M2C200-C / WSS M2C200-D2, VW G 009 317 / G 052 171 / G 052 178 / G 052 512 / G 052 726, VW G 060 726 / VW G 50 / VW GO 52 527 A2 / GO 70 726 A2, FIAT 9.55550-MZ1 / MZ6, VOLVO 97308		✓	✓		
Traxium Gear 6 75W-85	✓		API GL-4	SUITABLE FOR: KIA, HYUNDAI, NISSAN, MITSUBISHI, SUZUKI, DAEWOO, DAIHATSU / CAR MANUFACTURERS REQUESTING 75W-85 SAE GRADES		✓	✓		

● OEM APPROVED ● MEETS THE REQUIREMENTS / SUITABLE FOR

Transtec


middle range for manual transmissions and axles



Antiwear performance guaranteed under extreme-pressure

Dedicated to manual transmissions, transaxles, steering gears and transferboxes, Transtec lubricants are specifically designed for the lubrication of various applications to give an excellent wear protection under severe oxidation, at high load conditions.

5
Transtec




4
Transtec



Thermal and oxidation stability test

163°C
during
50 H

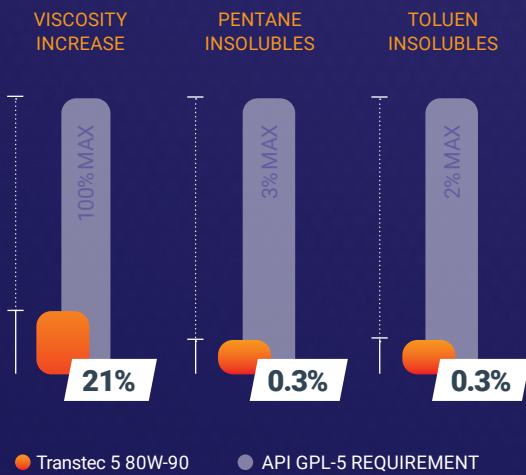


Excellent oxidation stability and low formation of deposits

Transtec 5 exceeds substantially API GL-5 requirements and contribute to protect all mechanical parts while improving drivability.



PRODUCT BENEFITS

PRODUCT NAME			International specifications	PRODUCT BENEFITS		
				Durability	Gear shifting	Extreme pressure
Transtec 5 75W-90	✓	✓	API GL-5 MIL-L 2105 D	✓		✓
Transtec 5 80W-90	✓	✓	API GL-5 MIL-L 2105 D	✓		✓
Transtec 5 85W-90	✓	✓	API GL-5 MIL-L 2105 D	✓		✓
Transtec 5 85W-140	✓	✓	API GL-5 MIL-L 2105 D	✓		✓
Transtec 5 SAE 90	✓	✓	API GL-5 MIL-L 2105 D	✓		✓
Transtec 5 SAE 140	✓	✓	API GL-5 MIL-L 2105 D	✓		✓
Transtec 4 75W-90	✓	✓	API GL-4	✓	✓	
Transtec 4 80W-90	✓	✓	API GL-4	✓	✓	
Transtec 4 85W-90	✓	✓	API GL-4	✓	✓	
Transtec 4 85W-140	✓	✓	API GL-4	✓	✓	
Transtec 4 SAE 90	✓	✓	API GL-4	✓	✓	
Transtec 4 SAE 140	✓	✓	API GL-4	✓	✓	
Transtec 4 SAE 80W	✓	✓	API GL-4	✓	✓	

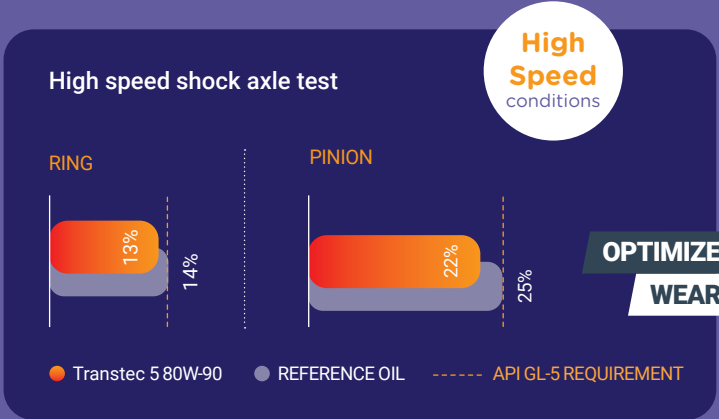

Fluidmatic advanced range for automatic gearboxes



A powerful protective solution to promote oxidation resistance for a longer period of time

Fluidmatic synthetic base oils contribute to the protection of the components of your automatic gearbox and greatly enhance friction performance.


LEVEL 3



50 000
cycles

Performance Friction test
GK Bench TesT

COEFF FRICTION (μ)

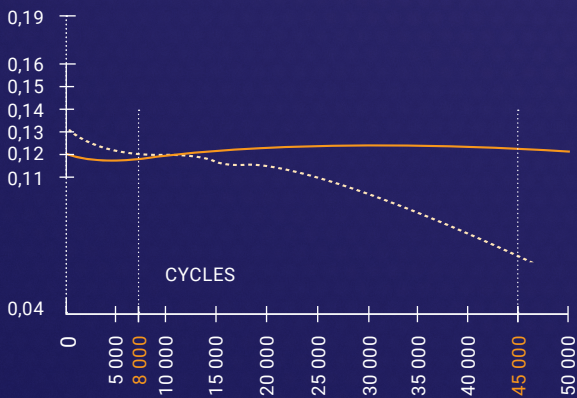


- M μ - Fluidmatic DCT MV maintains a high friction coefficient during 50.000 cycles, equivalent to a complete drain interval
- STANDARD LUBRICANT

LEVEL 2



LEVEL 1





STANDARD LEVEL

ADVANCED LEVEL

PRODUCT BENEFITS

Fuel economy
Good anti-shudder
Enhanced driving comfort
Extended component life
OEM approved
Multi vehicles

Product name



OEM specifications

Fluidmatic
XLD FE



ZF TE ML 04D, 14B, 14L, 20B, 25B / VOITH H55.6336XX, H55.6335XX / MAN 339 TYPE L1/V1/V2/ZZ/Z11, MB APPROVAL 236.6/236.9 / ALLISON C4 (N° 32802009) / VOLVO 97341 MEETS THE REQUIREMENTS: FORD MERCOR, MERCON V, GM DEXRON IIIH / IIIIG / IIID, JASO M315-1A, SUITABLE FOR: ALLISON TES-386 / TES-295, AISIN WARNER, JWS 3309, JWS 3314, JWS 3317, BMW 7045E, 5 SERIES, LA 2634, LT 71141, HONDA Z-1, HYUNDAI/KIA/MITSUBISHI SP-II, SP-III, MITSUBISHI ATF J-2, MAZDA ATF MIII / M-V, MB 236.1/236.2/236.5/236.7/236.10/236.11/236.81/236.91, NISSAN 402, NISSAN Matic-D, J, K, SUBARU ATF, ATF-HP TOYOTA T, TH, TIII, TIV, VOLVO 97340, VW/AUDI G 052 162, G 052 990, G 052 025, ZF TE ML 05L/09/11A/11B/17C

Fluidmatic
SYNT295



ALLISON TES-295 / ALLISON TES-468

Fluidmatic
SYNT668



ALLISON TES-668TM, ALLISON TES-295* (BACKWARD COMPATIBLE*)
1TES 668 IS NOT APPROVED FOR USE IN TC10 TRANSMISSIONS

Fluidmatic
DVIMV



MEETS THE REQUIREMENTS: FORD MERCOR® LV, MERCON®, WSS M2C 138CJ, 166H, WSS M2C 922A1, 924A (XT8-QAW), ESP-M2C166H, XL-12, GM DEXRON® VI, TASA, II, IID, IIE, IIIH, JASO M315-1A, M315-1A/L, M315 2A, SUITABLE FOR: AISIN JWS 3324 (WS), JWS 3309 (FV), ALLISON C3,C4, BENTLEY P/N PY112995PA, FORD/LINCOLN/MERCURY XT2-QDX (M), XT2-QSM (SYN), FNR5 (MAZDA M5, XT9-QMM5), AUDI/VOLKSWAGEN G 052025-A2, G 052055, G 052162-A1/A2, G 052162 (ZF LIFEGUARD FLUID 5), G 052990, G 053001, G 053025-A2, G 055005-A1/A2/A6 (ZF LIFEGUARD FLUID 6), G 055025 A2 (JWS 3309), G 055162-A2/A6 (ZF LIFEGUARD FLUID 6 PLUS), G 055540 (A2), G 060162 (ZF LIFEGUARD FLUID 8), G US000 162, TL 52162, BMW/MINI LA2634, LT71141 (ZF 5 HP 18FL/19FL/24A), ZF SHP18FL, SHP24, SHP30, 7045E, ETL 80728, 83 22 0 142 516 (ZF LIFEGUARD FLUID 6) MINI COOPER TV, FCA ATF +4/2 +3(M5 7176E), P/N 05127382AA, 68043742AA, 68157995AA, 68157995AB, 68171866AA/68171866AA, 68218925AA, MOPAR SP IV, AS 68 RC, AS 69 RC (FV), FIAT 9.555SAV5, CHRYSLER/DODGE/JEEP P/N 05127382AA, 68043742AA, 68171866AA, FORD/LINCOLN/MERCURY P/N XT-8-QAW, XT-2-QDX (M) ORQSM, GM P/N 1940700, 1940467, 21005966, 22717466, 88, 1940467, 1940700, 1940767, 21005966 (TRANSAXLE), 22717466, 88900925, 9986195, 93160993, TRANSFER CASE, GM/GMCOPEL/SATURN 88863400, 88863401, HONDA TYPE 3.1: 08263-999-01HE (EU), 08200-9017 (USA) (ZF LIFEGUARD FLUID 9) (ZF NO. AAD1.500.001), HYUNDAI-KIA NWS-9638, SP-III / SP-IV / SP-IV M / SP-IV-RR / SPH-IV / P/N 040000C90SG, NUMM040 CH20 RED-1, Z27, Z27, LAND ROVER P/N LR023288, P/N LR023288, TYK500050, LR0022460, PORSCHE P/N 00004320528, 00004320509, 99991754700 (A2), Z 000169756, SAAB P/N 93165147, 93160393, ZF 6/ 8/ 9 SPEED, AT (6HP/8HP/9HP), MB 236.15, MITSUBISHI DIAQUEEN SK, SP-II, SP-III, SP-IV, AW, JZ, J3, ATF-MA1/PA, MAZDA ATF D-II/M-III / M-V / FZ F-1/S-1/N-1/3317, MAN 339A, PSA 16 350 560 80, Z 000169756, AL4 AUTOMATIC GEARBOX OIL (#9730 AB), PORSCHE P/N 000 043 205 28, 000 043 205 09, 999 917 547 00 (A2), Z 000169756, ATF 3403M115, SAAB P/N 93 165 147, 93 160 393, SUBARU K0140Y0700, NISSAN Matic C/D/J/K/P/S, RENAULT DPO/AL4, Matic D2, SAMSUNG SATT-F, SUZUKI ATF 2326, 2384K, 3314, 3317, TOYOTA ATF D-II/III, TH, TV, ATF WS, THS II, VOITH H55.6335XX (G607), SVC BLN #013 AND #118, VOLVO AT102 (97342), ZF 3/4/6/ 8/ 9 SPEED AT (6HP/8HP/9HP), ZF TE ML 05L, 09, 11A, 11B, 21L, ZF 5HP18FL/19FL/20/24/24A/30

Fluidmatic
LV MV



SUITABLE FOR: AISIN WARNER JWS 3324, AW1, GM DEXRON VI, FORD MERCOR LV / MERCON SP MB 236.12/14/15/17/41, HONDA DW-1 ATF TYPE 3.0/3.1, BENTLEY P/N PY112995PA, AUDI/VOLKSWAGEN G 052 533, G055 005 (A, A2) / G 055 540 (A2), BMW/MINI P/N 83 22 0 142 516 / 83 22 0 397 114 / 83 22 0 152 426 / 83 22 2 163 514 / 83 22 2 289 720 / 83 22 2 305 397 / 83 22 2 355 599, CHRYSLER/DODGE/JEEP P/N 05127382AA, 68043742AA, 68157995AA/AB, 68218925AA, FORD P/N XT-10-QLV, XT-6-QSP OR-DSP, GM P/N 88863400, 88863401, 12378515, HYUNDAI-KIA P/N 040000C90SG, SP-IV / SPH-IV, SP-IV-M, SP-IV-RR, NWS-9638 T5, JASO 1A (M315), JAGUAR-LAND ROVER P/N TYK500050, 02JDE 26444 / FLUID 8432, P/N 023288/023289/TYK500050/LR0022460, LV, MASERATI P/N Z31603, MAZDA FW 6A EL, FW 6AX EL, FZ, MB 236.12/14/15/17/41, MITSUBISHI ATF-J3, ATF-PA, PORSCHE P/N 000 043 304 00, SAAB P/N 93 165 147, ZF 6 SPEED AT (6HP) / 8 SPEED AT (8HP) / 9 SPEED AT (9HP), NISSAN Matic-S, Matic-H, Matic-I, Matic-J, Matic-K, Matic-L, Matic-M, Matic-N, Matic-O, Matic-P, Matic-Q, Matic-R, Matic-S, Matic-T, Matic-U, Matic-V, Matic-W, Matic-X, Matic-Y, Matic-Z, Matic-AA, Matic-AB, Matic-AC, Matic-AD, Matic-AE, Matic-AF, Matic-AG, Matic-AH, Matic-AI, Matic-AJ, Matic-AK, Matic-AL, Matic-AM, Matic-AN, Matic-AO, Matic-AP, Matic-AQ, Matic-AR, Matic-AS, Matic-AT, Matic-AU, Matic-AV, Matic-AW, Matic-AX, Matic-AY, Matic-AZ, Matic-AA, Matic-AB, Matic-AC, Matic-AD, Matic-AE, Matic-AF, Matic-AG, Matic-AH, Matic-AI, Matic-AJ, Matic-AK, Matic-AL, Matic-AM, Matic-AN, Matic-AO, Matic-AP, Matic-AQ, Matic-AR, Matic-AS, Matic-AT, Matic-AU, Matic-AV, Matic-AW, Matic-AX, Matic-AY, Matic-AZ

Fluidmatic
MV



SUITABLE FOR: AISIN WARNER JWS 3309 / 3317, ALLISON C4 / 295 / 389, CHRYSLER/DODGE/JEEP ATF +2 / +3 / +4, FORD WSS-M2C922-A1, MERCON / MERCON V, GM DEXRON® IIIIG / IIIH, TYPE A SUFFIX A/II/IE/IIIH/H, HONDA Z-1, HYUNDAI SP-II/ III / P/N LM040 CH20 RED-1, JASO 1A (M315), MB 236.5/6/7/8/9/91/10/11, AUDI/VOLKSWAGEN G 052 025 A2, G 052 055, G 052 162 (A1, A2), G 052 990 (A2), G 055 025 (A2), G US000 162, BMW/MINI P/N 81229400272/275, 81229407858/859, 3220024249/359, 83220026922, 83220402413, 83220403248, 83227542290, 3229407765, 83229407807, FORD P/N XT-2-QDX (M), XT-2-QSM (SYN), XT5-QM (OU DM) (V), XT8-QAW (PREMIUM), XT9-QMM5 (FNR5), GM P/N 1940700, 1940767, 21005966, 22717466, 88900925, 9986195, ISUZU P/N 062009001, JAGUAR JLM 20238, JLM 20292, JLM 20344, MAN 339A, MAZDA F-1, M5, MIII, TYPE TV/P/N XT9-QMM5, RENAULT / NISSAN Matic D/2, Matic-J, Matic-K, 402, PORSCHE P/N 000 043 204 41, 000 043 205 09, 000 043 205 28, 999 917 547 00 (A2), PSA P/N Z 000169756, SSANG YONG DSH SM-66, SUBARU P/N K0140Y0700, SUZUKI 33133317, TOYOTA D-II / T / TH / TIII / TIV, VCE : 127397341, VOLVO P/N 1161521 / 1161540 / 1161640, ZF D-II / T / TIII / TIV TE ML 11A/B

Fluidmatic
CVT MV



SUITABLE FOR: AUDI/VOLKSWAGEN TL 521 80 (G 052 180 A2) / TL 521 16 (G 052 516) / AUDI MULTITRONIC, BMW MINI COOPER 83 22 0136 376 / 83 22 0 429 154, DAIHATSU AMXMM CVTF DFE / CVT FLUID DC & DFC & TC, PUNCH CVTF-EX1, JATCO CVT 8 HYBRID, HONDA HMMF, HCF2, Z-1, HYUNDAI CVT-1, SP III CVT, MAZDA JWS 3320, MITSUBISHI CVTF-J1, CVTF J-4 / J-4+, SP III CVT, ECO J4, NISSAN NS-1, NS-2/ZV, NS-3, RENAULT CVT CK/SK/FK, SUBARU ICVT, ICVT FG, ECVT, NS-2, LINEARTRONIC CHAIN CVT AND CVT II FLUID, K0425Y0710 & K0425Y0711, SUBARU LINEARTRONIC HIGH TORQUE (HT) CVT FLUID, CV30, K0421Y0700, SUZUKI CVT GREEN 1&2 / V / CVTF TC/3320/4401 NS-2, TOYOTA CVTF TV / CVTF FE THS-II

Fluidmatic
DCT MV



MEETS THE REQUIREMENTS: AUDI/VOLKSWAGEN TL 052 182 / TL 052 529, FORD WSS-M2C 936-A, MB 236.21 SUITABLE FOR: AUDI/VOLKSWAGEN DQ250, DQ500, DL501, G 055 529, G 052 182, G 052 529, BMW P/N 83 22 2 148 578 / 83 22 2 148 579 / 83 22 0 440 214 / 83 22 2 147 477, CITROEN 6DCT451, FORD/GETRAG 6DCT450, 6DCT451, 7DCT300, MERCEDES-BENZ F-DCT350, F-DCT500, VOLVO P/N 1161838 / 1161839, MITSUBISHI 6DCT470, PORSCHE / ZF 7D745HL, 7D745HLA, 7D745FL, 7D745FLA, 7D745HL, 7D745HLA, 7D745FL, 7D745FLA

Fluidmatic
DCT-1



MAGNA/GETRAG 7DCT300, RENAULT DWS WET CLUTCH TRANSMISSION, DAIMLER MB APPROVAL 239.22, FORD WSS-M2C218-A2

Fluidmatic
D3



MB-APPROVAL 236.9 VOLVO 97340, VOLVO 97341, MAN 339 TYPE V1/Z1, VOITH H55.6335XX, ZF TE ML 04D/14A
MEETS THE REQUIREMENTS: GM DEXRON IID / IIIIG / IIIH/TASA, FORD MERCOR®, MAN 339 TYPE L1/L2, ALLISON C4, BOSCH TE ML 09 · SUITABLE FOR: MAN 339 TYP L1/L2, MB 236.2, 5, 6, 7, 8, 10, VOLVO 97337, 97335, 97325, ZF TE ML 05L, 11, 21L

Fluidmatic
D2



ZF TE ML 03D/04D/14A/17C, VOITH H55.6335XX, MAN 339 TYPE V1/Z1, VOLVO 97340, VOLVO 97341, MERCEDES-BENZ MB-APPROVAL 236.9
MEETS THE REQUIREMENTS: GM DEXRON IID / IIIIG / IIIH/TASA, FORD MERCOR®, ALLISON C4, BOSCH TE ML 09
SUITABLE FOR: MAN 339 TYP L1/L2, MB 236.2, 5, 6, 7, 8, 10, VOLVO 97337, 97335, 97325, ZF TE ML 05L, 11, 21L

Fluidmatic
AT42



MAN 339 TYPE V1/Z1/L1/L2, MERCEDES-BENZ MB-APPROVAL 236.1, VOITH H55.6335XX, VOLVO CE 97341, ZF TE ML 04D/14A
MEETS THE REQUIREMENTS: ALLISON C4 (TES-228), FCA CHRYSLER +3, FORD MERCOR®, GM DEXRON® IIIIG/IIID/IE, GM DEXRON TASA, ZF TE ML 05L/21L/09/11A/11B
SUITABLE FOR: ALLISON TES-389, BMW GROUP 24-30, ZF TE ML 03D/17C

Fluidmatic
ATX



MERCEDES-BENZ MB-APPROVAL 236.61, MAN 339 TYPE V1/Z1, VOITH H55.6335XX, ZF TE ML 03D/04D/09/11A/14A/17C, PSA S71 2102
MEETS THE REQUIREMENTS OF: FORD MERCOR®, GM DEXRON® IID
SUITABLE FOR: ALLISON C4, BMW GROUP 23-30, 24-30

Fluidmatic
DIII MV



SUITABLE FOR: GM DEXRON® IIIIG / IIIH, FORD MERCOR®, ZF TE ML 14A, ALLISON C4

Fluidmatic
DII MV



SUITABLE FOR: GM DEXRON® IID, FORD MERCOR®, ZF TZ-ML 14A

Fluidmatic
F TYPE



MEETS THE REQUIREMENTS: FORD WSS M2C-33F/G, VOLVO 97330
SUITABLE FOR: FORD TRANSMISSIONS C3, C4

● OEM APPROVED ● MEETS THE REQUIREMENTS / SUITABLE FOR

