

Styrelf[®] ECO²

ready-to-use technical
solution for reduced
temperature asphalt mix



TotalEnergies

Styrelf® ECO²,


Performance at low temperatures



All by simply reducing the temperature!

Used for wearing courses and base courses.
Compatibility with the incorporation of recycled materials.
Faster return to traffic.

Energy consumption

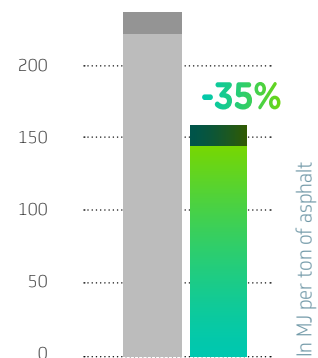

Performance similar

to that of hot mix Styrelf®
- In terms of mechanical performance and durability



Lowering of temperatures

for coating and application by 40°C
- Energy savings
- Reduced CO₂ emissions



Ready to use


- No modifications needed to mixing plant equipment
- No investment needed to use reduced temp. mix technology



Improved comfort

and visibility for on-site teams
- Fewer fumes

Greenhouse-gas emissions in asphalt mix plant



■ Hot mix prepared with conventional modified bitumen
■ Reduced temp. coating with Styrelf® ECO2