



Transmission in action


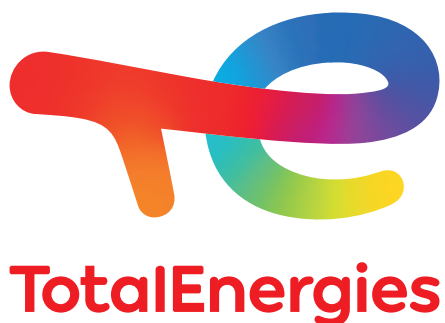




Table of content

TotalEnergies, Committed to Better Energy	4
Transmission Oil, the secret of your tranquility	5
Confidence inside gives the best performance outside	6
Put the transmission in action and let the rest happen	8
Traxium, advanced range for manual gearboxes and axles	10
Transtec, middle range for manual gearboxes and axles	12
Fluidmatic, advanced range for automatic gearboxes	14

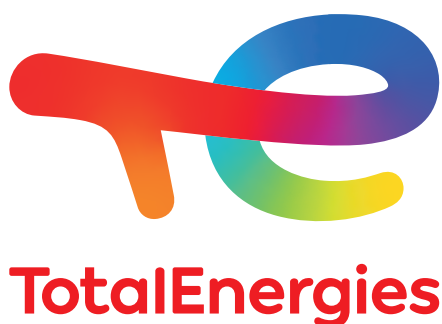

CUTTING EDGE R&D IN LUBRICANT INNOVATION FOR OVER 60 YEARS

TotalEnergies Lubrifiants is a leading global manufacturer and marketer of lubricants. We have 42 production plants worldwide and more than 5,800 employees in 160 countries. TotalEnergies Lubrifiants offers innovative, efficient and environmentally responsible products and services developed by more than 300 researchers at its R&D center. TotalEnergies Lubrifiants is a partner of choice for the automotive, industrial and marine markets.

A LEADING GLOBAL ENERGY COMPANY

TotalEnergies Marketing & Services develops and markets products primarily derived from crude oil, along with all the associated services. Our 31,000 employees are present in 150 countries and our product and service offerings are sold in 160 countries.

Every day, TotalEnergies Marketing & Services serves more than 8 million customers in our network of over 14,000 service stations in 62 countries. As the world's fourth-largest distributor of lubricants and the leading distributor of petroleum products in Africa, TotalEnergies Marketing & Services operates 50 production sites worldwide where we manufacture the lubricants, bitumen, additives, special fuels and fluids that sustain our growth.

TotalEnergies, COMMITTED TO BETTER ENERGY

TotalEnergies is a major energy player, that produces and markets fuels, natural gas and low-carbon electricity. Our 100,000 employees are committed to better energy that is safer, more affordable, cleaner and accessible to as many people as possible. Active in more than 130 countries, our ambition is to become the responsible energy major.



Transmission Oil, the secret of your tranquility



GET INSIDE A COMPLETE RANGE OF HIGH-TECH LUBRICANTS

The driveline is an essential element of your vehicle that requires optimal lubrication to exploit its full potential. This is why our lubricants are continuously evolving over time to accompany the evolution of gearboxes and axles technologies. As a result, we offer a full range of high-tech lubricants dedicated to axles, manual and automatic transmissions.

Traxium
Fluidmatic
Transtec



Confidence inside give the best performance outside

THE TRACK IS OUR LAB

TotalEnergies Lubrifiants is a significant player in the field of motor sports, supplying race teams and organizers with products and services of exceptional quality.

The expertise developed for motor racing guarantees to the drivers an optimized "protection, reliability and performance" for their engines and transmissions.

This is because racing is an unrivalled experimental laboratory for the development of tomorrow's consumer products.




PERFORMANCE & INNOVATION



R&D AT ITS BEST

Transmission is an unknown and complex component of heavy duty vehicles and passenger cars, often underrated but it is an essential equipment for the availability rate and performance of the vehicles.

TotalEnergies invests a huge time and resources in the R&D that allows to improve considerably the performance of our range of transmission fluids to accompany vehicle and equipment manufacturers.

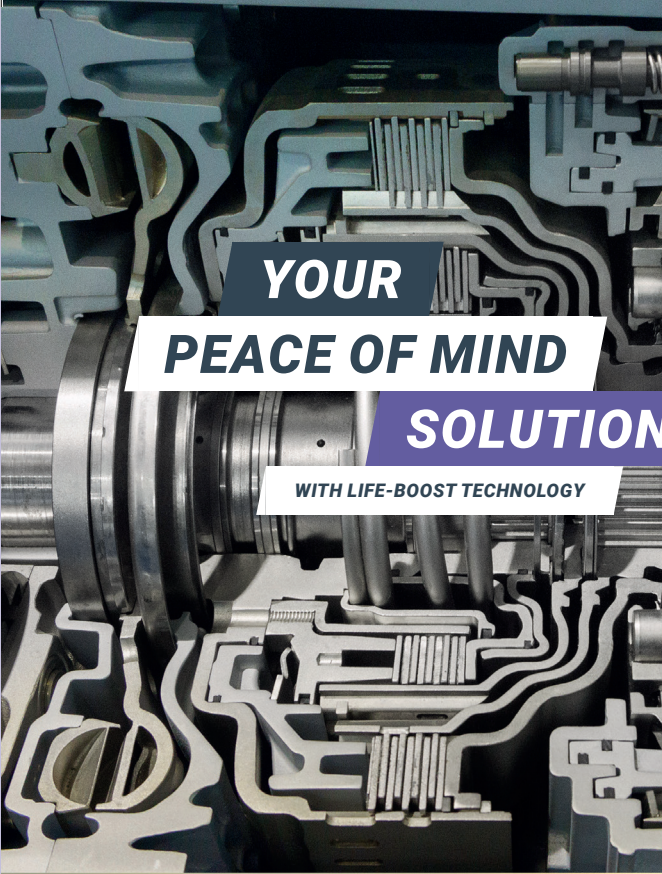

YOUR PEACE OF MIND SOLUTION

WITH LIFE-BOOST TECHNOLOGY



- ★ **EXTENDED DRAIN INTERVALS** ✓ **REDUCED TCO**
- ✓ **OEMS APPROVALS** ✓ **DURABILITY**

Our products with Life-boost technology will maximise the durability of the components and parts of the driveline equipments of your vehicle. We guarantee the Durability of your driveline equipments because our products are approved by the Manufacturers. Our products will offer the best services as your vehicle will require drastically less maintenance by providing reduced Total Cost Ownership (TCO) with on top significant extended drain intervals. A solution which offer a peace of mind throughout the normal life time of your vehicle.



REDUCE YOUR MAINTENANCE COST

WITH SAVINGS TECHNOLOGY



- ★ **REDUCED TCO** ✓ **OEMS APPROVALS** ✓ **DURABILITY**

Our range of products with savings technology are formulated to guarantee long life performances. They will contribute over time to reduce your maintenance costs as your vehicle will run with fewer interruptions. This will guarantee a reduced Total Cost Ownership (TCO) that will make the difference.



LUBRICANTS YOU CAN TRUST

WITH APPROVED TECHNOLOGY



- ★ **OEMS APPROVALS** ✓ **DURABILITY**

We develop tailor-made lubricants in our advanced R&D center in France in close collaboration with vehicle and equipment manufacturers. By working this way we fulfill their most specific technical requirements allowing our products to be approved by those manufacturers.

Transmission in action

Put the transmission in action and let the rest happen



EXCELLENT VISCOSITY STABILITY

Our products are formulated to remain shear stable over time providing extended life time of the fluid.

Even under very severe constraints of shear, to ensure adequate lubrication all over time.


Moreover, it provides fast and reliable lubrication at extreme cold temperatures.



EXCEPTIONAL FRICTION AND ANTI-SHUDDER PERFORMANCES


Our transmission oil technology provides consistent shift performance for the life of the transmission. It helps to maintain an excellent shifting quality over a very long time, improves overall transmission and contributes to fuel economy.

Each product has been formulated with selected friction modifiers which provide excellent friction characteristics. These improve driver's comfort with smooth and efficient shifting without shudder.



FUEL ECONOMY PROPERTIES


Because of their formulation and excellent low temperature performance, our fluids provide extended fuel economy benefits.



FILM-STRENGTH AND ANTI-WEAR PROPERTIES


Outstanding film-strength and anti-wear properties which provide a perfect lubrication all over time and protection of the transmission.

These properties give you a very good protection against wear and long transmission life.



EXCELLENT PARTS MATERIAL COMPATIBILITY

A wide range of lubricants which are adapted to the specific needs of each of our customers, and manufacturers technical requirements.



ENHANCED THERMAL STABILITY AND OXIDATION RESISTANCE

Our high quality synthetic base oils and superior anti-oxidant and detergent additives provide a very good oxidation control of the fluid over time even in very severe conditions.

Outstanding oxidation and thermal stability resulting in lower deposit, for a maximal drain interval capability and better protection to extend life and performance of your product.

Traxium

advanced range for manual transmissions and axles



The driveline is just as important as the engine to maximize your overall vehicle performance.

Developed in state-of-art research facilities, TotalEnergies' range of innovative oils is just what you need for longer protection, higher efficiency and industry-approved performance.

Oxidation Performance test
CEC L-48-A-00

163°C
during
384 H



9
Traxium



8
Traxium



7
Traxium



6
Traxium





STANDARD LEVEL



ADVANCED LEVEL

PRODUCT BENEFITS

Product name



International specifications

OEM specifications

Fuel economy

Durability

Gear shifting

Extended drain intervals

OEM approved

Traxium Dual 9 FE75W-90

API GL-4 / API GL-5 /
API MT-1 / SAE J2360MERCEDES-BENZ TRUCKS DTFR 12B140 (235.8),
MAN 341 TYP GA-1, MAN 341 TYPE Z-2, MAN 342 TYPE S-1,
SCANIA STO 2.0 A FS, SCANIA STO 1:1 G,
VOLVO 97312, MERITOR O-76N, MACK GO-J PLUS,
DAF, IVECO RAS1
MEETS THE REQUIREMENT OF: SCANIA STO 1:0

Traxium Gear 9 FE75W-90



API GL-4

MERCEDES-BENZ TRUCKS DTFR 13B110 (235.11)



Traxium Gear 9V FE75W-90



API GL-4

VOLVO 97315



Traxium Gear 9 FE75W-80



API GL-4

ZF TE-ML 01E / 02E / 16P, VOITH CLASS C, VOLVO 97307,
MAN 341 TYPE Z5, MAN 341 TYPE VR, MERCEDES-BENZ
TRUCKS DTFR 13D120 (235.29), IVECO MGS2

Traxium Gear 9 FE SAE 75W



API GL-4

PSA B71 2316, PSA B71 2317



Traxium Gear 9 SG 75W-90



API GL-4

SCANIA STO 2:0 G, MAN 341 GA2



Traxium Axle 9 FE 75W-140



API GL-5

SCANIA STO 2:0 A, MERITOR O-76M • SUITABLE FOR: SAE J2360



Traxium Axle 9 80W-90

API GL-5 / API MT-1 /
SAE J2360SCANIA STO 1:0, ZF 05A / 12L / 12M / 16B / 17B / 19B / 21A
MAN 342 TYP M-3, MAN 341 TYP GA-1, MERCEDES-BENZ DTFR
12B110 (235.20), IVECO RAM1, MERITOR O-76D, MACK GO-J

Traxium Dual 8 FE 80W-90

API GL-4 / API GL-5 /
API MT-1ZF 05A / 12L / 12M / 16B / 17H / 19B / 21A, MAN 341 TYPE Z-2,
MAN 342 TYPE M-2, SCANIA STO 1:0, SCANIA STO 1:1G,
VOLVO 97321, IVECO RAM1, MERITOR O-76D, MACK GO-J
MEETS THE REQUIREMENT OF: MAN 341 TYP E-2

Traxium Gear 8 FE75W-80



API GL-4

MAN 341 TYPE Z-4, ZF TE-ML 01L / 02L / 16K
VOLVO 97307, DAF, IVECO MGS1
MEETS THE REQUIREMENT OF: MAN 341 TYP E-3

Traxium Gear 8 75W-80



API GL-4 +

PSA B71 2330



Traxium Axle 8 FE 75W-140



API GL-5

SCANIA STO 1:0 • SUITABLE FOR: SAE J2360



Traxium Axle 8 80W-90



API GL-5 (LS)

PSA PEUGEOT CITROEN B71 2375



Traxium Axle 8 FE 80W-140



API GL-5 / API MT-1

SCANIA STO 1:0, ZF 05A / 12M / 16D / 21A



Traxium Axle 8 85W-140



API GL-5 / SAE J2360

SCANIA STO 1:0, VOLVO 97321, IVECO RAM2, MERITOR O-76A,
MACK GO-J • MEETS THE REQUIREMENT OF: ZF 07A/08

Traxium Gear 7 80W-90



API GL-4

MERCEDES-BENZ MB 235.1, MERCEDES-BENZ
TRUCKS DTFR 13B100 (235.1), ZF TE-ML 16A / 17A / 19A
MEETS THE REQUIREMENT OF: MAN 341 TYP E-1

Traxium Gear 7 80W-85



API GL-4

MERCEDES-BENZ MB 235.1, MERCEDES-BENZ TRUCKS DTFR
13B100 • MEETS THE REQUIREMENT OF: MAN 341 TYP E-1

Traxium Gear 7 85W-90



API GL-4

MERCEDES-BENZ MB 235.1, MERCEDES-BENZ TRUCKS DTFR
13B100 (235.1), ZF TE-ML 16A, 17A, 19A
MEETS THE REQUIREMENT OF: MAN 341 TYP E-1

Traxium Axle 7 80W-90



API GL-5

ZF TE-ML 05A / 12E / 16B / 17B / 19B / 21A, MAN 342 TYPE M-2,
IVECO RAM1 • MEETS THE REQUIREMENT OF: MAN 341
TYPE M-1, VOLVO 97306

Traxium Axle 7 85W-90



API GL-5

ZF TE-ML 16C / 17B / 19B / 21A, MERCEDES-BENZ MB 235.0,
MERCEDES-BENZ TRUCKS DTFR 12B100 (235.0)
MEETS THE REQUIREMENT OF: MAN 342 TYP M-1

Traxium Axle 7 85W-140



API GL-5

ZF TE-ML 05A / 12E / 16D / 21A, IVECO RAM2
MEETS THE REQUIREMENT OF: MAN 342 TYP M-1

Traxium Gear 6 75W-80



API GL-4

SUITABLE FOR: BMW MTF LT-1 / LT-2 / LT-3 / LT-4
GM W16612, GM P/N 1940004 / 19259104 / 1940182 / 1940764
/ 1940768, FORD WSD M2C200-C / M2C200-D2, KIA P/C M5CF1-
1, VW G 009 317 / 052 171 / 052 178 / G 052 512 / G 055 512 /
G 052 726 / G 060 726 / 501 50 (G50) / G 052 527 / G 070 726 /
G 052 549, VW P/C DSG DQ100 / DQ200, HONDA MTF / MTF-II,
NISSAN MT-XZ / MT-XZ TL (JR TYPE), FIAT 9.55550-MZ1 / MZ6 /
MZ7, FIAT P/C DRY DCT C635, RENAULT P/C DC4,
RENAULT P/C 6DCT250, RENAULT P/N 77 11 428 122,
VOLVO 97308 / 93309, VOLVO P/N 1161645

Traxium Gear 6 75W-85



API GL-4

SUITABLE FOR: KIA, HYUNDAI, NISSAN, MITSUBISHI, SUZUKI,
DAEWOO, DAIHATSU

● OEM APPROVED ● MEETS THE REQUIREMENTS / SUITABLE FOR

Transtec

middle range for manual transmissions and axles




Antiwear performance guaranteed under extreme-pressure

Dedicated to manual transmissions, transaxles, steering gears and transferboxes, Transtec lubricants are specifically designed for the lubrication of various applications to give an excellent wear protection under severe oxidation, at high load conditions.

Thermal and oxidation stability test

163°C
during
50 H

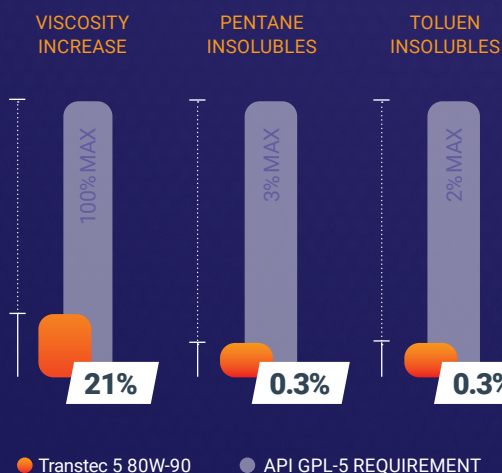

5
Transtec



4
Transtec



Excellent oxidation stability and low formation of deposits

Transtec 5 exceeds substantially API GL-5 requirements and contribute to protect all mechanical parts while improving drivability.



PRODUCT BENEFITS

Product name			International specifications	Durability	Gear shifting	Extreme pressure
Transec 5 75W-90	✓	✓	API GL-5	✓		✓
Transec 5 80W-90	✓	✓	API GL-5 MIL-L 2105 D	✓		✓
Transec 5 85W-90	✓	✓	API GL-5 MIL-L 2105 D	✓		✓
Transec 5 85W-140	✓	✓	API GL-5 MIL-L 2105 D	✓		✓
Transec 5 SAE 90	✓	✓	API GL-5 MIL-L 2105 D	✓		✓
Transec 5 SAE 140	✓	✓	API GL-5 MIL-L 2105 D	✓		✓
Transec 4 75W-90	✓	✓	API GL-4	✓	✓	
Transec 4 80W-90	✓	✓	API GL-4	✓	✓	
Transec 4 85W-90	✓	✓	API GL-4	✓	✓	
Transec 4 85W-140	✓	✓	API GL-4	✓	✓	
Transec 4 SAE 90	✓	✓	API GL-4	✓	✓	
Transec 4 SAE 140	✓	✓	API GL-4	✓	✓	
Transec 4 SAE 80W	✓	✓	API GL-4	✓	✓	

High speed shock axle test

High
Speed
conditions

RING



PINION



OPTIMIZED

WEAR PROTECTION

● Transec 5 80W-90 ● REFERENCE OIL - - - - - API GL-5 REQUIREMENT

Fluidmatic advanced range for automatic gearboxes




A powerful protective solution to promote oxidation resistance for a longer period of time

Fluidmatic synthetic base oils contribute to the protection of the components of your automatic gearbox and greatly enhance friction performance.

Performance Friction test GK Bench TesT

COEFF FRICTION (μ)

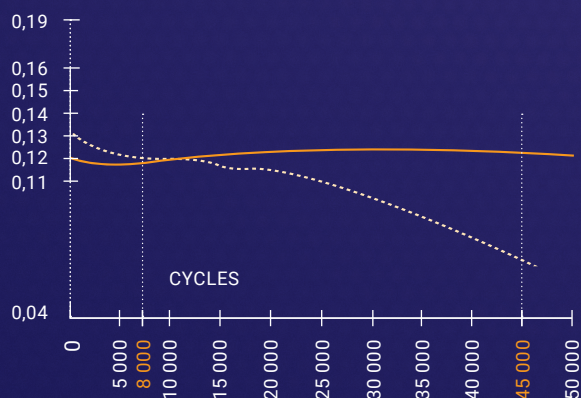

50 000
cycles

- μ - Fluidmatic DCT MV maintains a high friction coefficient during 50.000 cycles, equivalent to a complete drain interval
- STANDARD LUBRICANT

LEVEL 3



LEVEL 2



LEVEL 1





STANDARD LEVEL



ADVANCED LEVEL

PRODUCT BENEFITS

Fuel economy
Good anti-shudder
Enhanced driving comfort
Extended component life
OEM approved
Multi vehicles

Product name



OEM specifications

Fluidmatic
XLD FE



Fluidmatic
SYNT668



Fluidmatic
DVIMV



Fluidmatic
LV MV



Fluidmatic
MV



Fluidmatic
CVT MV



Fluidmatic
DCT MV



Fluidmatic
DCT-1



Fluidmatic
D3



Fluidmatic
D2



Fluidmatic
AT42



Fluidmatic
ATX



Fluidmatic
DIII MV



Fluidmatic
DII MV



Fluidmatic
F TYPE



ZF TE-ML ZF TE-ML 04D / 14B / 16L / 20B / 25B, VOITH H55.6335.XX, H55.6335.XX, MAN 339 TYPE V1 / V2 / Z2 / Z11, MERCEDES-BENZ TRUCKS DTRF 13C170 (236.9), VOLVO 97341, DANA-OHTM-ATF (APPROVAL ID 23C-0004) - MEETS THE REQUIREMENTS OF: ALLISON C4 TES-228, FORD MERCON V, GM DEXRON III, H, MERCEDES-BENZ MB 236.6 / MB 236.2 / MB 236.5 / MB 236.7 / MB 236.10 / MB 236.11 / MB 236.81, MERCEDES-BENZ TRUCKS DTRF 13C100 (236.1), DTRF 13C120 (236.2), DTRF 13C140 (236.7), DTRF 13C160 (236.81), DTRF 13C180 (236.91), VOLVO 97340, ZF TE-ML 05L / 09 / 11A / 11B / 17C, AISIN WARNER, JWS 3309 / JWS 3314 / JWS 3317, BMW P/N ETL 7045E / P/N LA 2634 / P/N LT 71141, 5 SERIES, HONDA ATF-2, HYUNDAI SP-III, MITSUBISHI ATF-2, MAZDA ATF M-III / ATF M-V, NISSAN MATIC D / MATIC J / MATIC K / P/N 402, SUBARU ATF / ATF-H, TOYOTA TYPE T / TYPE F-III / TYPE F-III / TYPE F-III

ALLISON TES-668
MEETS THE REQUIREMENTS OF: MB 236.92, VOLVO 97341 - SUITABLE FOR: FORD MERCON, GM DEXRON III, H, ALLISON TES-295, VOLVO 97340

MEETS THE REQUIREMENTS OF: FORD MERCON LV, FORD WSS-M2C938-A, GM DEXRON VI, JASO M315-1A, M315-1A LV, M315-2A, SUITABLE FOR: AISIN WARNER, JWS 3324 / JWS 3309 / AW-1 / AW-2, ALLISON C3 / C4 (TES-228), BMW P/N LA 2634 / LT 71141 / ETL 7045E / ETL 80728 / 83 22 0 142 516, MINI COOPER TV, VW G 052 025 / G 052 055 / G 052 162 / G 052 162 / G 052 990 / G 053 001 / G 053 025 / G 055 005 / G 055 025 / G 055 162 / G 055 540, VW G 060 162 / G US 000 162 / TL 521 62, CHRYSLER ATF +4 / +2 / +3 (MS 71766), CHRYSLER P/N 05127382AA / 68043742AA / 68157995AA / 68157995AB / 6817866AA / 6817866AA / 68218925AA / MOPAR SP-IV, CHRYSLER P/N MOPAR AS 68 RC / MOPAR SP-IV / MOPAR AS 69 RC (TV), FIAT 9.55550-AV5, FORD MERCON, FORD WSS-M2C-138C / WSS-M2C-166H / WSS-M2C-922A1 / WSS-M2C-924A (XT-QAW), FORD ESP-M2C-166H (XL-T), FORD P/N XT-2-QX (M) / P/N XT-2-QSM (SYN) / P/N XT-8-QAW (PREMIUM) / P/N XT-9-QMMS (FNR), GM TASA, GM DEXRON II / ID / IE / IIG / IIH, GM P/N 1940467 / 1940700 / 1940767 / 21005966 / 22717466 / 88863400 / 88863401 / 88900925 / 9986195 / 93160393, GM P/C AUTOTRAK II, HONDA DW-1, HONDA ATF-21 (EXCEPT CVT) / ATF TYPE 3.0 / ATF TYPE 3.1 / ATF ULTRA II, HYUNDAI NWS-9638, HYUNDAI SP-III / SP-IV / SP-IV-M / SP-IV-R / SP-IV-H, HYUNDAI P/N 0400000C90SG / NUMMO40 CH20 RED-1, JLR P/N LR023288 / FORD 500050 / LR0022460 / JLM20238 / JLM20292 / K17 / FLUID 8432 / 02JDE2644A, MAZDA ATF D-III / ATF M-III / ATF M-V / ATF FZ / ATF F-1 / ATF S-1 / ATF N-1 / ATF 3317, MAN 339A, MB 236.15, MITSUBISHI ATF SK / SP-II / SP-III / SP-IV / AW / J2 / J3 / MA1 / PA, PORSCHE ATF 3403M115, PORSCHE P/N 000 043 205 09 / 000 043 205 28 / 999 917 547 00 (A2) / Z 000169756, PSA P/N 16 550 560 80 / Z 000169756, PSA P/C ALA (9730 AE) / EAT 6 / EAT 8 / NISSAN MATIC C / D / D2 / J / K / P / S, RENAULT P/C DPO / ALA, SUBARU ATF / ATF-H2, SUBARU ATF-2325 / 2384K / 3314 / 3317, TOYOTA TYPE D-III / D-III / TV / WS, TOYOTA P/C THS II, TESLA MODEL S / MODEL 3, VOITH H55.6335.XX, VOITH P/C SVC BLTN #013, VOITH P/C SVC BLTN #118, VOLVO 97342, ZF TE-ML 05L / 09 / 11A / 11B / 21L, ZF P/N LIFE GUARD FLUID 5 / 6 / 8 / 9, ZF P/C SHP18FL / SHP19FL / SHP20 / SHP24 / SHP24A / SHP30, ZF P/C 6HP / 8HP / 9HP, BENTLEY P/N PY112995PA, ISUZU ISUZU ATF IISUZU ATF IISUZU ATF SP-P/N SCS FLUID, P/N 08200-9001, SAAB P/N 93 165 147, 93 160 393

SUITABLE FOR: AISIN WARNER, JWS 3324 / AW-1, BMW P/N 83 22 0 142 516 / 83 22 0 397 114 / 83 22 2 152 426 / 83 22 2 163 514 / 83 22 2 289 720 / 83 22 2 305 397 / 83 22 2 355 599, VW G 052 533 / G 055 005 / G 055 540 / G 060 162, CHRYSLER P/N 05127382AA / 68043742AA / 68157995AA / 68157995AB / 68218925AA, FORD WSS-M2C938-A / MERCON LV, FORD MERCON SP, FORD P/N XT-6-QSP / XT-6-DSP / XT-10-QLV, GM DEXRON® VI, GM P/N 88863400 / 88863401 / 12378515, HONDA DW-1, HONDA ATF TYPE 3.0 / TYPE 3.1, HYUNDAI SP-IV / SP-IV-M / SP-IV-R / SP-IV-H, NISSAN 9638 T5, HYUNDAI P/N 0400000C90SG, JASO M315-1A LV, JLR P/N 02JDE 2644A, JLR P/N FLUID 8432, JLR P/N LR023288, JLR P/N LR023289, JLR P/N TYK30050, JLR P/N LR0022460, JLR P/N MAZDA FW 6A EL / MAZDA FW 6A EL / MAZDA FZ MB 236.12 / 236.14 / 236.15 / 236.17 / 236.41, MITSUBISHI ATF-J3 / ATF PA, PORSCHE P/N 000 043 304 00, NISSAN MATIC S / MATIC W, TOYOTA TYPE WS, VOLVO P/N 31256774 / 31256775, ZF P/N LIFE GUARD FLUID 6 / 8 / 9, BENTLEY P/N PY112995PA, MASERATI P/N 231603, SAAB P/N 93 165 147

SUITABLE FOR: AISIN WARNER, JWS 3309 / 3317, ALLISON C4 / 295 / 389, CHRYSLER/DODGE/JEEP ATF +4 / +3 / +4, FORD WSS-M2C922-A1, MERCON / MERCON V, GM DEXRON IIG / IIH, TYPE A SUFFIX A / ID / IE / IIG / IIH, HONDA Z-1, HYUNDAI SP-III / P/N UM040 CH20 RED-1, JASO M315-1A, MERCEDES-BENZ MB 236.5 / 6 / 7 / 8 / 9 / 10 / 11, AUDI/VOLKSWAGEN G 052 025 A2, G 052 055, G 052 162, G 052 990, G 055 025, G US 000 162, BMW/MINI P/N 81229400272/275, 81229407858/859, 3220024249/359, 83220026922, 83220402413, 83220403248, 83227542290, 3229407765, 83229407807, FORD: P/N XT-2-QDX (M), XT-2-QSM (SYN), XT-5-QM OU-DM (V), XT-8-QAW (PREMIUM), XT-9-QMMS (FNR), GM P/N 1940700, 1940767, 21005966, 22717466, 88900925, 9986195, ISUZU P/N 08200-9001, JAGUAR JLM 20238, JLM 20292, JLM 21044, MAN 339A, MAZDA F-1, M5, MHL TYPE TV, P/N XT-9-QMMS, RENAULT / NISSAN MATIC-D/D2, MATIC-J, MATIC-K, 402, PORSCHE P/N 000 043 204 41, 000 043 205 09, 000 043 205 28, 999 917 547 00 (A2), PSA P/N Z 000169756, SSANGYONG DSH SM 466, SUBARU P/N K0140Y0700, SUZUKI 3313, 3317, TOYOTA D-III / T / TV, VOLVO 97341, VOLVO P/N 1161521 / 1161540 / 1161640, ZF D-III / T / TV, ZF TE-ML 11A/B

SUITABLE FOR: BMW P/N EZL 779 / 799A / ZF CVT V1 / 83 22 0 136 376 / 83 22 0 429 154, VW TL 521 80 / 521 16, VW G 052 180 / 052 516, CHRYSLER NS-2, CHRYSLER CVT-4, GM DEX CVT, HONDA HMMF / HOF2 / Z-1, HYUNDAI SP-CVT1, HYUNDAI SP-III CVT, HYUNDAI P/N HY045000A61, MAZDA, JWS 3320, MITSUBISHI CVTF-J1, MITSUBISHI CVTF J-4, MITSUBISHI CVTF J-4, MITSUBISHI SP-III CVT, MITSUBISHI CVTF ECO J-4, NISSAN NS-1 / NS-2 / NS-3 / ZV, RENAULT P/C CVT CK / SK / FK, SUBARU CVT / ICVT FG / ECVT / NS-2, SUBARU P/N LINEARTRONIC CHAIN CVT FLUID, SUBARU P/N LINEARTRONIC CHAIN CVT II FLUID, SUBARU P/N LINEARTRONIC CHAIN CVT III FLUID, SUBARU P/N LINEARTRONIC HT CVT FLUID, SUBARU P/N K0425Y0710, SUBARU P/N K0425Y0711, SUBARU P/N K0421Y0700, SUBARU P/N CV-30, SUZUKI CVTF TC / 3320 / 4401 / GREEN 1 / GREEN 2 / GREEN 1V / NS-2, TOYOTA CVTF TC / FE, TOYOTA P/C THS-II, AUDI P/C MULTITRONIC, DAIHATSU P/N AMMIX CVTF DFE, P/N AMMIX CVTF DFC, P/N AMMIX CVTF DFC, P/N FLUID TC, PUNCH CVTF-EX1

SUITABLE FOR: BMW: P/N 83 22 2 148 578 / 83 22 2 148 579 / 83 22 0 440 214 / 83 22 2 147 477, VW TL 521 82 / TL 525 29 / G 052 182 / G 052 529 / G 055 529 / P/C DQ250 / P/N DQ250 / P/C DL 382, FORD WSS-M2C-936-A, FORD P/C 6DCT450 / 6DCT451 / 7DCT300, MB 236.21, MB P/N 001 989 85 03, MB P/C F-DCT350 / F-DCT500, MITSUBISHI MZ20065 DIA-QUEEN SSFT, MITSUBISHI P/C 6DCT470, PORSCHE P/N 999 917 080 00, PORSCHE P/C 7D45HL / 7D45HLA / 7D45FL / 7DFL / 7D770HLA / 7D775 / 7D775A, PSA 9734 S2, PSA P/C 6DCT451, RENAULT P/C DW6, VOLVO P/N 116 1838 / 116 1839, VOLVO P/C 6DCT450

FORD WSS-M2C218-A2, MAGNA P/C 7DCT300, MB 239 22, RENAULT P/C DW5
MEETS THE REQUIREMENTS OF: MB 239.21, MB P/C 7DCT300 - SUITABLE FOR: BMW P/N 83 22 2 433 157, BMW P/C 7DCT300, FCA P/C 7DCT300, FORD WSS-M2C-218-A1, FORD P/C 7DCT300

ZF TE-ML 04D/14A, MAN 339 TYPE V1/Z1, VOITH H55.6335.XX, VOLVO 97341, MERCEDES-BENZ TRUCKS DTRF 13C170 (236.9), DANA-OHTM-ATF (APPROVAL ID 23C-0005) - MEETS THE REQUIREMENTS OF: ALLISON C4 (TES-228), FORD MERCON, GM DEXRON IIG / IIH, VOLVO 97340, BOSCH TE-ML 09 - SUITABLE FOR: GM TASA, DEXRON IID, MAN 339 TYP L1/L2, MERCEDES-BENZ MB 236.2 / MB 236.5 / MB 236.6 / MB 236.7 / MB 236.8 / MB 236.10, MERCEDES-BENZ TRUCKS DTRF 13C120 (236.2) / DTRF 13C140 (236.7) / DTRF 13C150 (236.8), VOLVO 97337, 97335, 97323, ZF TE-ML 05L / 11, 21L

ZF TE-ML 03D / 04D / 14A / 17C, MAN 339 TYPE V1/Z1, VOITH H55.6335.XX, VOLVO 97341, MERCEDES-BENZ TRUCKS DTRF 13C120 (236.9) MEETS THE REQUIREMENTS OF: ALLISON C4 (TES-228), GM TASA, DEXRON IID, VOLVO 97340, BOSCH TE-ML 09 - SUITABLE FOR: FORD MERCON, MAN 339 TYP L1/L2, MERCEDES-BENZ MB 236.2 / MB 236.5 / MB 236.6 / MB 236.7 / MB 236.8 / MB 236.10, MERCEDES-BENZ TRUCKS DTRF 13C120 (236.2), DTRF 13C140 (236.7), DTRF 13C150 (236.8), VOLVO 97337 / 97335 / 97325, ZF TE-ML 05L / 11 / 21L

MAN 339 TYPE V1/Z1, MB 236.1, VOITH H55.6335.XX, VOLVO CE 97341, ZF TE-ML 04D / 14A / 11B
MEETS THE REQUIREMENTS OF: ALLISON C4 (TES-228), ZF TE-ML 05L / 21L / 09 - SUITABLE FOR: ALLISON TES-389, FCA CHRYSLER +3, FORD MERCON, GM TASA, GM DEXRON IIG/IID/IE, MAN 339 TYPE L1/L2, PSA P/C 4HP14, PSA P/C 4HP18, VOLVO CE 97340, ZF TE-ML 03D / 17C, BMW GROUP 24-3.0

MAN 339 TYP V1/Z1, PSA S71 2102, VOITH H55.6335.XX
MEETS THE REQUIREMENTS OF: MB 236.6H - SUITABLE FOR: ALLISON C4 (TES-228), FORD MERCON, GM TASA, GM DEXRON IID/II, MAN 339 TYP L2, ZF TE-ML 03D / 04D / 14A / 17C / 09 / 11A, BMW GROUP 23-3.0, 24-3.0

SUITABLE FOR: GM DEXRON IIG / IIH, FORD MERCON, ZF TE-ML 14A, ALLISON C4 (TES-228)

SUITABLE FOR: GM DEXRON IID, FORD MERCON, ZF TE-ML 14A

MEETS THE REQUIREMENTS OF: FORD WSS-M2C-33F/G, VOLVO 97330 - SUITABLE FOR: FORD P/C C3, FORD P/C C4

● OEM APPROVED ● MEETS THE REQUIREMENTS / SUITABLE FOR

